


WorkDrawing-600x600-600-20130906


This paper is meant to install HYDROVIEW™ windows and custom Hydrosight underwater windows. Each window is build individually according to the customers specifications. This computer generated file gives the customer the dimensions for the corresponding wall opening.

window shape	rectangular window
clear view dimensions	600 x 600mm
aprox. total window size including frame	780 x 780mm
type of waterproofing	V4A / 316l stainless steel frame with adhesive flange for concrete or tiled finish
estimated weight for one window	46 kg

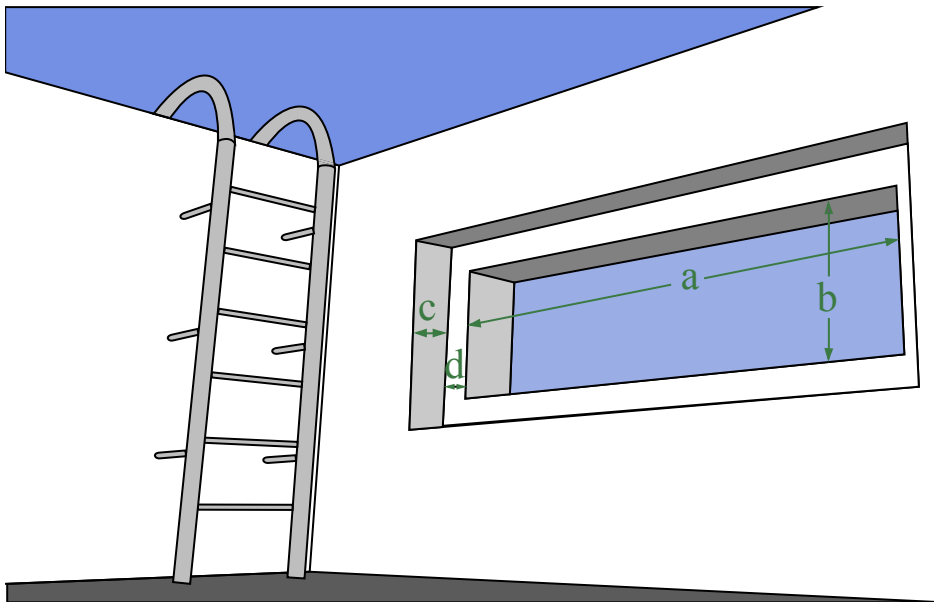

Opening in Concrete Wall before Mounting the Window

- a = 600 mm (clear view width)
- b = 600 mm (clear view height)
- c = 30 mm (recess opening depth)
- d = 100 mm (recess opening width)
- h = 2900 mm (maximum water level over window bottom)

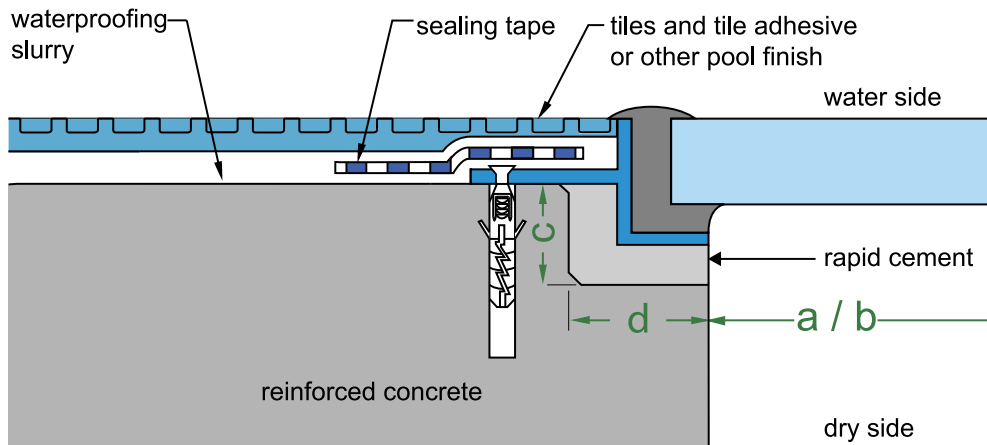

Profile view of installed underwater window with sealing tape

Installation material included in the offer for all 2 window(s) (if not noted otherwise)

- 4 x 10kg Waterproofing Slurry
- 8.9m Sealing Tape
- approx. 38 stainless Wall Anchors
- mounting instructions

Tile and Tile adhesive layer assumed to be of approx. 15mm thickness.

issued 06.09.13 - © Hydrosight 2009-2013.

This calculation comes with absolutely no warranty, to the extent permitted by applicable law